


Movement cal. 2416

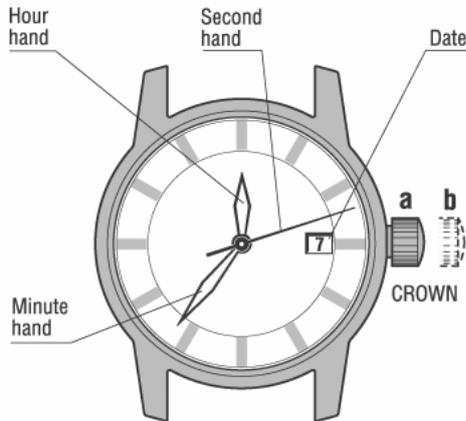

Technical Specifications:

Diameter: 24mm, Height: 6,3mm, 31 Jewels
Central second-hand, date indicator
19.800 vhp
Accuracy is about -10 to +30 seconds per day.
Power reserve 31 hours
Automatic Winding and Shock-resistance
The date indicator switches automatically at 24 o'clock

Manual

1. Before the watch is used the first time it should be wound by rotating the crown. Later the watch will be wound automatically when wearing it.
2. To set the time, please pull out the crown and adjust the time (clockwise). After that press the crown in its initial position (*Note for watches with screwed-in crown: first unscrew the crown counter clockwise, then adjust the time by rotating the hands clockwise, finally screw the crown back while slightly pressing it.*)
3. The date switches automatically at midnight.
4. **To set/change the date**
 - Pull out / unscrew the crown.
 - Turn hands until the next date appears /Check that **a.m.** period is set (the date changes once in 24 hours) by turning the hands clockwise past the 12 o'clock marker; if the date changes the time is set for the **am.** period. If the date does not change, the time is set for the **p.m.** period and you should turn the hour hand for one more 12-hour-circle./
 - To set/change the date for several days turn hands clockwise and counterclockwise alternatively in the range 12h–7h-12h until the next day's date appears. Repeat this till you reach the desired date
 - Pull in/screw-in the crown.

ATTENTION:

- Any Automatic watch should be worn at least 8 hours daily to insure optimal performance!
- Do not rotate the hands counter clockwise at the moment when the time-disc begins to move and the date changes! Wait till the date is changed, then continue adjusting/setting the time/date.

If you follow these instructions and use the watch carefully it will work trouble-free and keep high accuracy for a long time.